



Bendix® Versajust® LS™ with the WearMax™ Clutch  
Optimum performance for extended lining and drum life.

Are your brakes a drag on your bottom line?



Maintains  
Optimum  
Brake  
Performance.

### **Bendix has the solution.**

**The Bendix® Versajust® Slack Adjuster** helps optimize brake performance and extend lining and drum life to boost your bottom line.

Many slacks over adjust and cause dragging brakes, which accelerates wear on the brake lining and drum. To avoid this problem, some slack manufacturers create a larger running clearance—but that leaves you with minimal reserve chamber stroke, and increased risk of roadside inspection issues.

Versajust's gradual and precise adjustment rate minimizes the risk of over adjustment and dragging brakes. Since brake performance is optimized, you may see up to 16% more lining life, and 30% more drum life. By lowering the need for brake adjustments, Versajust reduces maintenance costs and downtime. And Versajust provides maximum chamber reserve stroke to help lower the risk to your CSA scores and support safety.

Versajust is built to last with advanced sealing technology and is backed by a 6-year/1 million mile line-haul warranty, one of the industry's best.

## Precise adjustment principles ensure proper adjustment across all applications

- Extends brake lining life and helps maintain brake balance
- Less sensitive to varying temperatures and duty-cycles
- Maximizes the efficiency of the brake system
- Fewer parts to stock

## Built to last. Sealed from contaminants

- Prolongs product life; reduces downtime and maintenance costs

## Easy to install, use & maintain

- Unhanded
- No installation template required
- No external brackets required
- Interchangeable with welded & universal (1.3" pin-to-pin) clevises


## Stay with the best. Stay with Bendix®.

The Bendix® Versajust® Slack Adjuster (with corresponding clevis) can be installed as a direct replacement for the equivalent Bendix® ASA-5® model.

When replacing a Bendix ASA-5 slack with a Versajust model:

- Replacement of an ASA-5 on one side of the vehicle axle, no longer requires replacement of the ASA-5 on the other side of the axle. The Versajust and ASA-5 slacks are cross-compatible on the axle.
- All other installation instructions and considerations remain the same as that of the Bendix ASA-5 model.

Bendix ASA-5 Slack Adjuster Part Number	Bendix Versajust Kit Part Number	Spline	Arm
065170	K041870	1.5 - 10C	5.5"
065700	K041870	1.5 - 10C	5.5"
065174	K043197	1.5 - 28	5.5"
065247	K043197	1.5 - 28	5.5"
065172	K041876	1.5 - 10C	6.0"
065344	K041876	1.5 - 10C	6.0"
065175	K041877	1.5 - 28	6.0"
065176	K041877	1.5 - 28	6.0"

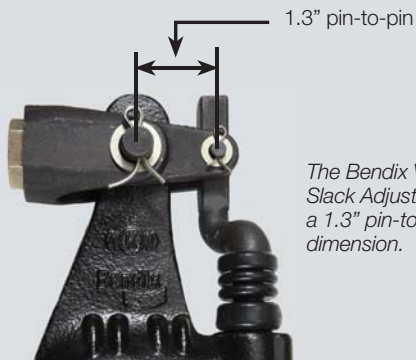

The Bendix Versajust Slack Adjuster features a 1.3" pin-to-pin clevis dimension.

## Designed for universal fit, the Bendix® Versajust® LS™ Slack Adjuster can replace just about any other slack adjuster

Stemco-Crewsun non Auto-Check	Bendix® Versajust® LS	Arm Length	Camshaft Spline	Yoke Style	Adaptor Thread
MK21100S	<b>K041870</b>	5.5	1.50" - 10	EO*	5/8"
MK21106S	<b>K041876</b>	6.0	1.50" - 10	EO	5/8"
MK21300S	<b>K102424</b>	5.5	1.50" - 10	EO- 5/8 Offset	1/2"
MK22100S	<b>K043197</b>	5.5	1.50" - 28	EO	5/8"
MK22106S	<b>K041877</b>	6.0	1.50" - 28	EO	5/8"
MK22300S	<b>K102427</b>	5.5	1.50" - 28	EO- 5/8 Offset	5/8"
MK23100S	<b>K102369</b>	5.5	1.63" - 37	EO	5/8"
MK23106S	<b>K102371</b>	6.0	1.63" - 37	EO	5/8"
MK24300S	<b>K102277</b>	5.5	1.25" - 10	EO- 5/8 Offset	5/8"
MK24400S	<b>K102422</b>	5.5	1.25" - 10	EO- 5/8 Offset	1/2"
MK25400S	<b>K102423</b>	5.5	1.25" - 24	EO- 5/8 Offset	1/2"

Haldex® AA-1	Haldex® SABA	Bendix® Versajust® LS	Arm Length	Camshaft Spline	Yoke Style	Adaptor Thread
40010002 L		<b>K102277</b>	5.5	1.25" - 10	EO- 5/8 Offset	5/8"
40010003 R						
40010002 L		<b>K102422</b>	5.5	1.25" - 10	EO- 5/8 Offset	1/2"
40010003 R						
40010040 L		<b>K102423</b>	5.5	1.25" - 24	EO- 5/8 Offset	1/2"
40010041 R						
40010071	40020236	<b>K041870</b>	5.5	1.50" - 10	EO	5/8"
40010072	40020235	<b>K041871</b>	5.5	1.25" - 10	EO	1/2"
40010073		<b>K051512</b>	5.5	1.25" - 24	EO	5/8"
40010140	40020234	<b>K041877</b>	6.0	1.50" - 28	EO	5/8"
40010140	40020234	<b>K047150</b>	5.0	1.50" - 28	EO	5/8"
40010141	40020231	<b>K043197</b>	5.5	1.50" - 28	EO	5/8"
		<b>K102427</b>	5.5	1.50" - 28	EO- 5/8 Offset	5/8"
40010142	40020233	<b>K041876</b>	6.0	1.50" - 10	EO	5/8"
		<b>K050079</b>	5.0	1.50" - 10	EO	5/8"
40010143	40020236	<b>K041870</b>	5.5	1.50" - 10	EO	5/8"
40010208	40020214	<b>K102371</b>	6.0	1.63" - 37	EO	5/8"
40010213	40020213	<b>K102369</b>	5.5	1.63" - 37	EO	5/8"
40010214	40020214	<b>K102371</b>	6.0	1.63" - 37	EO	5/8"

Gunite			Bendix® Versajust® LS	Arm Length	Camshaft Spline	Yoke Style	Adaptor Thread
With 1.0 Clevis	Gunite 2000	W/O Clevis					
AS1131		AS1031	<b>K050079</b>	5	1.50" - 10	EO	5/8"
AS1132	AS1168	AS1032	<b>K041870</b>	5.5	1.50" - 10	EO	5/8"
AS1133	AS1169	AS1033	<b>K041876</b>	6.0	1.50" - 10	EO	5/8"
AS1136	AS1170	AS1036	<b>K041871</b>	5.5	1.25" - 10	EO	1/2"
AS1137		AS1037	<b>K046175</b>	5.0	1.25" - 24	EO	1/2"
AS1138	AS11171	AS1038	<b>K051512</b>	5.5	1.25" - 24	EO	5/8"
AS1139		AS1039	<b>K047150</b>	5.0	1.50" - 28	EO	5/8"
AS1140	AS1172	AS1040	<b>K043197</b>	5.5	1.50" - 28	EO	5/8"
AS1141	AS1173	AS1041	<b>K041877</b>	6.0	1.50" - 28	EO	5/8"
AS1143		AS1043	<b>K102369</b>	5.5	1.63" - 37	EO	5/8"
AS1144		AS1044	<b>K102371</b>	6.0	1.63" - 37	EO	5/8"
AS1152		AS1052	<b>K102422</b>	5.5	1.25" - 10	EO- 5/8 Offset	1/2"
AS1153		AS1053	<b>K102277</b>	5.5	1.25" - 10	EO- 5/8 Offset	5/8"
AS1154		AS1054	<b>K102423</b>	5.5	1.25" - 24	EO- 5/8 Offset	1/2"
AS1156		AS1056	<b>K102425</b>	5.5	1.50" - 10	EO- 5/8 Offset	5/8"
AS1157		AS1057	<b>K102427</b>	5.5	1.50" - 28	EO- 5/8 Offset	5/8"

\* Easy On Yoke

Find out why Bendix is the single source for all the solutions you need. Talk to your Bendix account manager, today. Call 1-866-610-9709, or visit [www.foundationbrakes.com](http://www.foundationbrakes.com).

